

SilvPAC® XLM-400B™ and XLM-600R™

Extra Capacity Stationary Cathode Silver Recovery Units for bleach-fix or fixer.


SilvPAC XLM (Extra Capacity - Low Maintenance) units provide the most efficient electrolytic silver recovery on the market.

The XLM-400B is engineered to desilver up to 2,000 gallons per day of EZ bleach-fix (regenerated RA bleach-fix) or NR type bleach-fix combined with low-flow wash, overflow C-41 fixer, and E-6 processing solutions. The XLM-600R is designed for large photofinishing, school photofinishing, and motion picture labs using a closed-loop fixer recirculation system.

CPAC's patented stationary cathode technology simplifies desilvering, enabling fast and efficient harvesting of silver flake. XLM units use a filtered power supply and can recover up to 97% of available silver using a batch process. These innovative systems require no replacement bearings, brushes, or motors – reducing maintenance costs by hundreds of dollars per year.

Features and Benefits

- Digital microprocessor controls with automatic current setback
- Internal caustic doser controller
- Continuous current controller
- Filtered DC power supply for maximum plating efficiency
- Protected electronics and keypad controls
- Optional tank and pumping packages
- Reduces electrical consumption
- Minimizes the need for replacement parts
- Cathode desilters easily in minutes

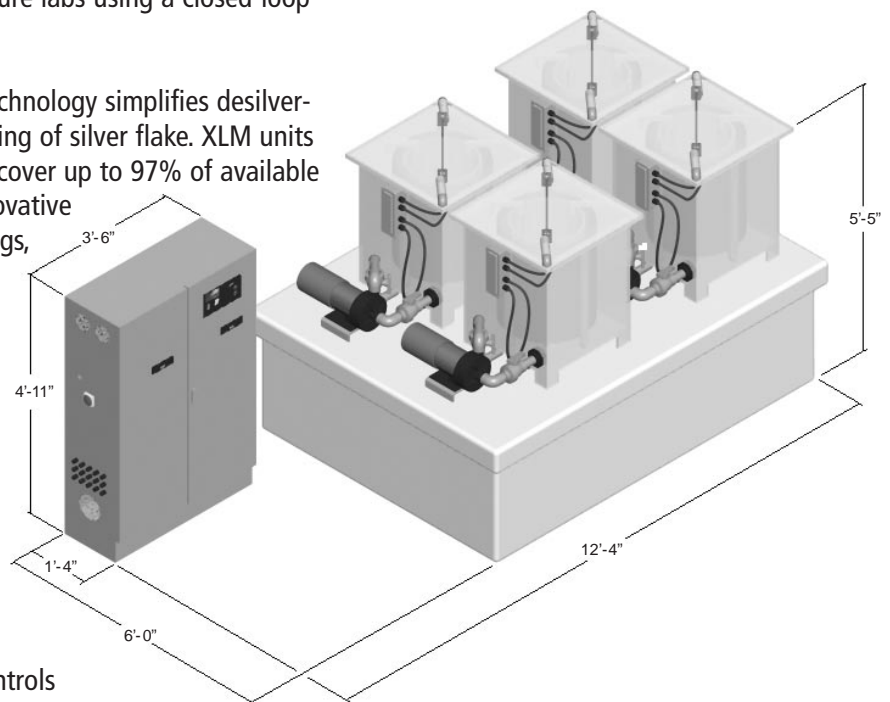

XLM-400B for batch desilvering of bleach-fix
(shown with optional desilvering tank).


Product Information

Materials of Construction

- Stainless steel cathode
- Polypropylene cell tanks and covers
- Carbon anodes
- Baked powder coated electrical enclosure
- DIN rail electrical components

Specifications

	XLM-400B	XLM-600R
Typical Application:	Batch desilvering of Bleach-Fix Up to 2,000 gallons/day – 24 hrs	Closed-loop desilvering of Fixer Up to 7,200 films/hr
Recovery Rate:	40 TO/hr (1,240 gm/hr)	60 TO/hr (1,860 gm/hr)
Unit Dimensions:	72" D x 148" W x 65" H 183 cm x 376 cm x 165 cm	60" D x 135" W x 59" H 152 cm x 343 cm x 150 cm
Cell Tank Dimensions:	43" D x 30" W x 36" H 109 cm x 76 cm x 91 cm	43" D x 30" W x 36" H 109 cm x 76 cm x 91 cm
Electronics Cabinet Dimensions:	16" D x 42" W x 59" H 41 cm x 107 cm x 150 cm	16" D x 42" W x 59" H 41 cm x 107 cm x 150 cm
Electrical Service (CE):	208-240 VAC, 50/60 Hz, 100 Amps	208-240 VAC, 50/60 Hz, 80 Amps

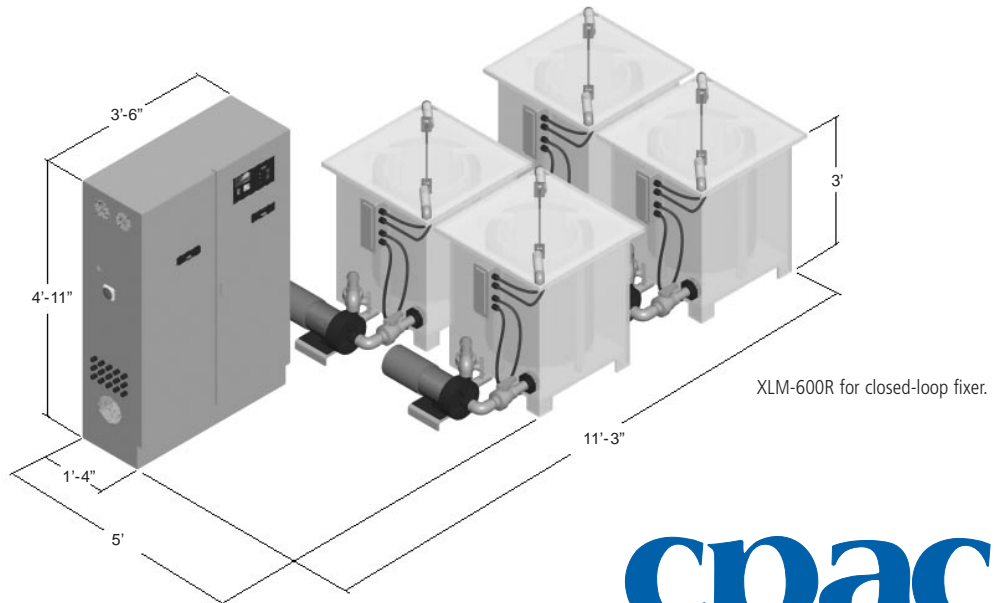

cpac
Imaging

PHONE (585) 382-3223
FAX (585) 382-9481